



CÂBLES D'ACIER GALVANISÉ



6x7 + 1

Diamètre	Poids / MT	Charge rupture
7	0,17	2.600
8	0,22	3.380
10	0,35	5.400
11	0,43	6.700
12	0,51	7.800
13	0,60	9.400
14	0,70	11.100
16	0,85	13.500


> Utilisation principal dans petits chalutiers.

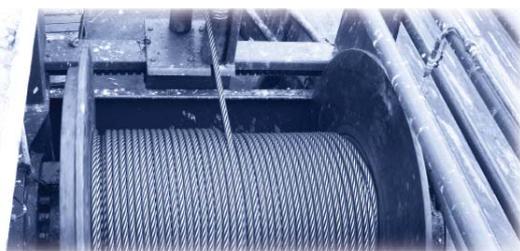

6x24 + 1

Diamètre	Poids / MT	Charge rupture
16	0,82	11.800
18	1,03	14.900
20	1,15	18.400
22	1,54	22.200
24	1,83	26.300
26	2,15	30.800
28	2,60	35.700

- > Câble d'utilisation générale
- > Spécial par manoeuvres
- > Bonne flexibilité



3x31

Diamètre	Poids / MT	Charge rupture
18	1,17	18.800
20	1,46	23.000
22	1,72	27.000
24	2,05	33.000
26	2,40	38.000
28	2,80	44.500
30	3,22	51.000

- > Câble antigiratoire
- > Faible allongement